

T-BAR CLIP

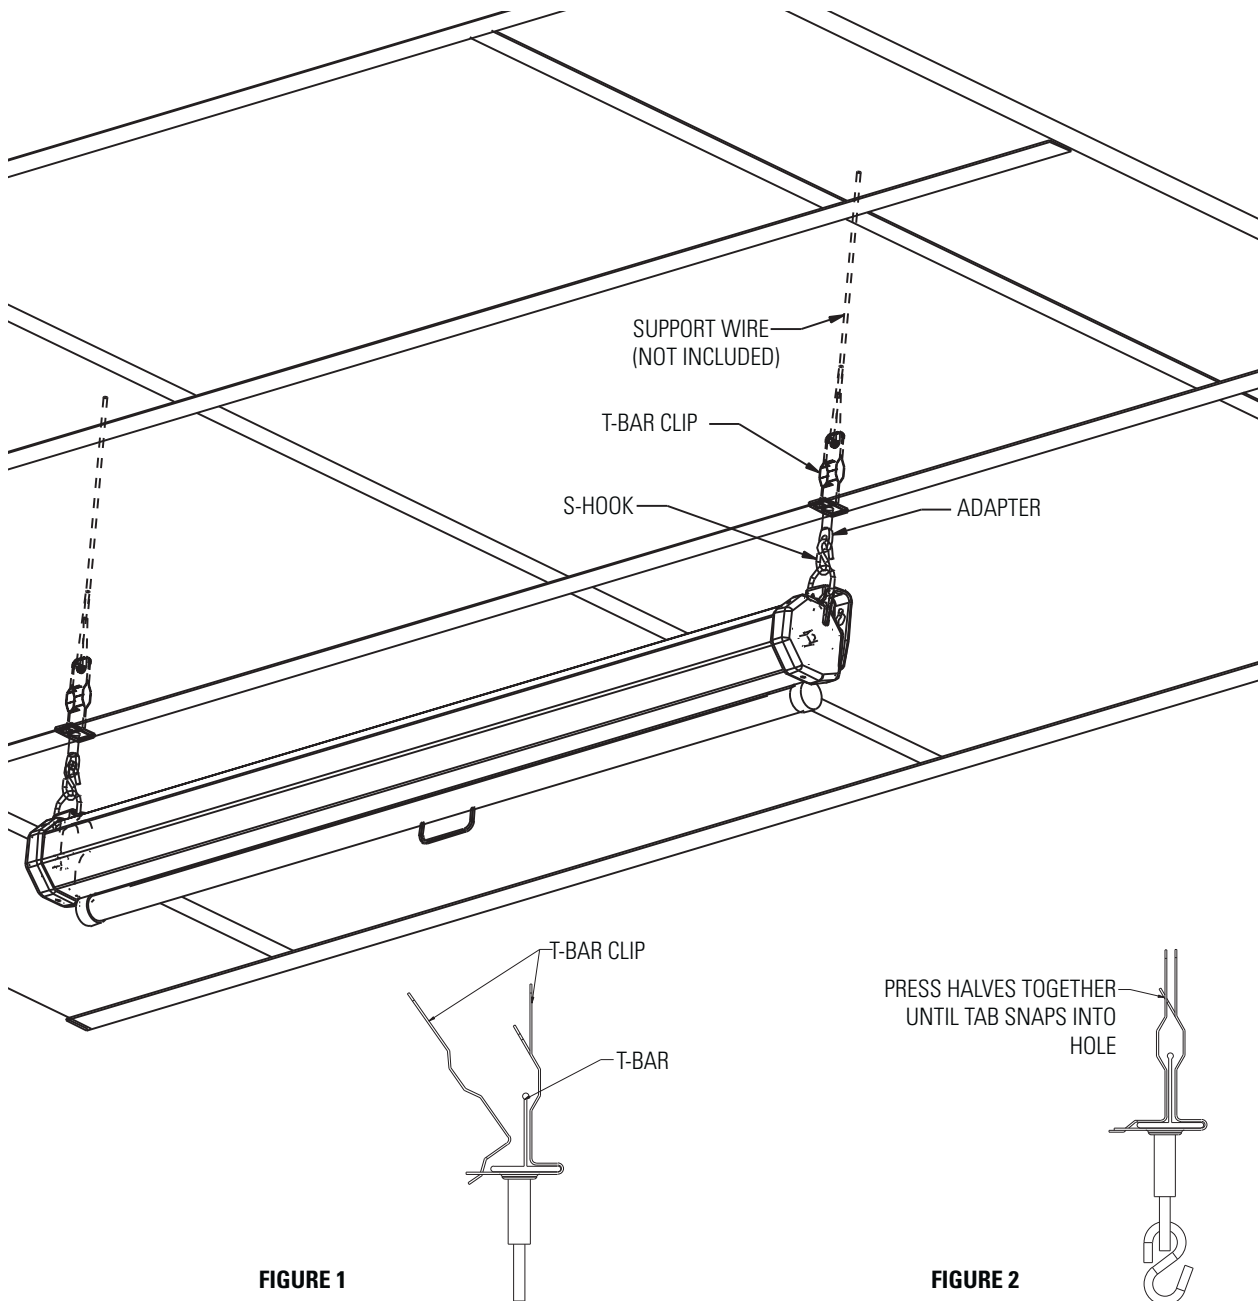


FIGURE 1

FIGURE 2

INSTRUCTIONS FOR HANGING A CLASSIC MANUAL SCREEN TO A DROP OR SUSPENDED CEILING

For use with Classic Manual Screens. For screens up to 20kgs.
Do not use on screens weighing over 20kgs.

1. Measure distance between D-rings of screen and transfer this distance to T-bar for location of T-bar clip
2. Attach T-bar clip to T-bar as shown in Figures 1 and 2.
Note: A support wire must be attached to the top of each T-bar Clip and attach to the building structure above the suspended ceiling. These support wires should be used to support the weight of the screen only, not the suspended ceiling. The t-bar grid ceiling should be installed according to the manufacturer's instructions and the additional support wires should only support the additional weight of the screen.
3. Insert S-hook into hole of adapter and D-ring of screen.
4. Use pliers to close both loops of S-hook.5. Do not remove for re-use.